

208~230V Mini Heat Pump

Model:
GMV-24WL/C-T(U)




Specifications	Unit	Parameter
Model	—	GMV-24WL/C-T(U)
Performance		
Rated Cooling Capacity(*1)	kBtu/h	24
Rated Heating Capacity(*2)	kBtu/h	28
Power Input	Cooling(kw)	2
	Heating(kw)	2.4
Sound Pressure Level	dB(A)	57
Operating Temperature Range	Cooling(Outdoor) ^{°C/°F}	-5~48 / 23~118
	Heating(Outdoor) ^{°C/°F}	-20~27 / -4~81
AHRI Ratings(Ducted/Non-Ducted)		
EER	(Btu/h)/W	11
SEER	(Btu/h)/W	18
HSPF	(Btu/h)/W	10
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230, 1, 60
Maximum Overcurrent Protection (MOP)	A	25
Minimum Circuit Amps (MCA)	A	21
Fan		
Type x Quantity	—	Axial-flow x 1
Air Flow Volume	CFM	2295
Fan Motor Running Current	A	0.95
Fan Motor Power Output	W	150
Compressor		
Compressor Type x Quantity	—	Inverter Rotary x 1
Compressor Rated Load Amps (RLA)	A	11.7
Compressor Refrigerant Oil Type	—	FW68DA
Compressor Refrigerant Oil Charge Volume	L/Gal	1/0.26
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ15.9/Φ5/8
	Liquid(mm/inch)	Φ9.52/Φ3/8
Max. Equivalent Connection Pipe Length(ODU to IDU)	m/ft	100/328
Refrigerant Charge	kg/oz	2.4/84.7
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	790×980×360/ (31-1/8×38-9/16×14-3/16)
Net Weight	kg/lbs	80/176
Other		
Indoor Unit	Total Capacity(%)	50%~135% of outdoor unit
	Max Connectable Quantity	4
Safety Certification	—	ETL/AHRI
Condenser Fin Color	—	Gold
Protection Devices	High Pressure	High pressure sensor, High pressure switch 601 psi (4.15 MPa)
	Inverter Circuit	Over-heat protection,Over-current protection
	Compressor	Discharge temp protection, Over-current protection

*1 Cooling | Indoor: 80°F(26.7°C)DB / 67°F(19°C)WB; Outdoor: 95°F(35°C)DB

*2 Heating | Indoor: 70°F(21.1°C)DB / Outdoor: 47°F(8.3°C)DB / 43°F(6°C)WB

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-24WL/C-T(U).

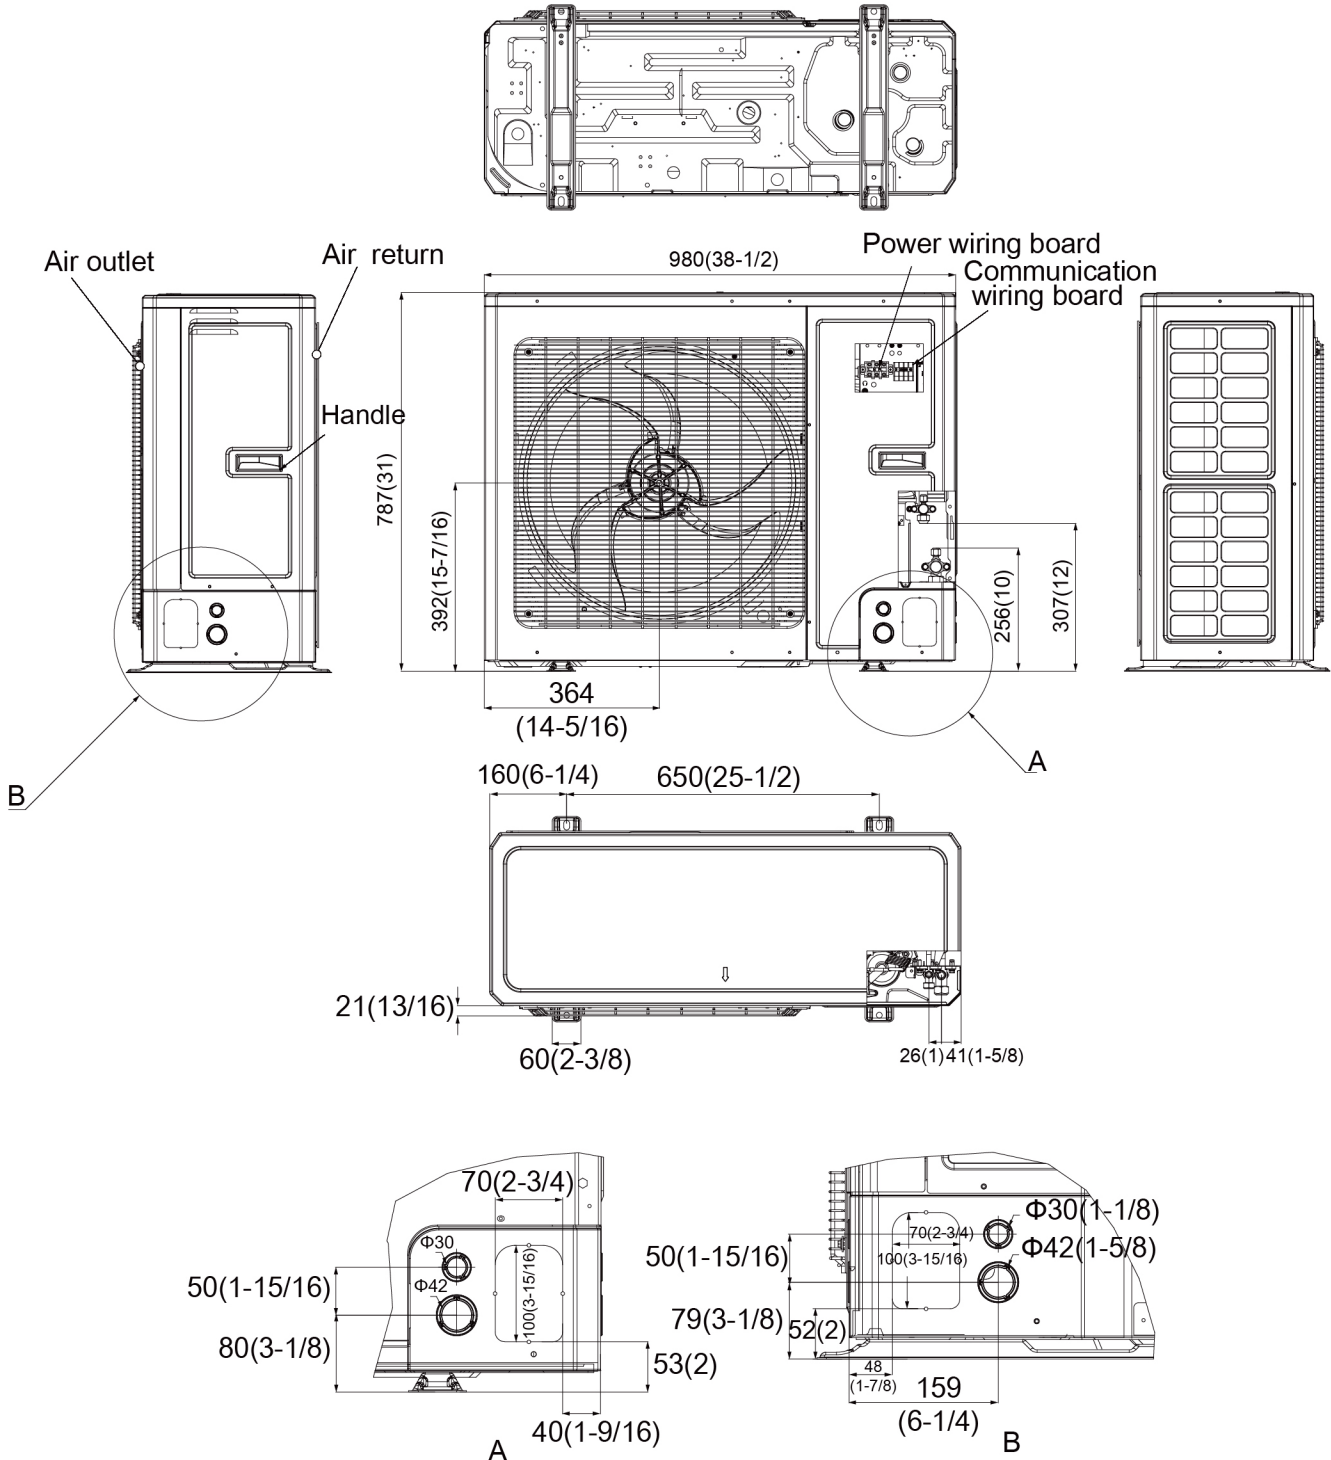

Unit:mm(in.)