

208~230V Wall-Mounted Lomo






Model:GMV-ND14G/B4B-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND14G/B4B-T(U)
Performance		
Rated Cooling Capacity	kBtu/h	15
Rated Heating Capacity	kBtu/h	17
Sound Pressure Level	dB(A)	37/40/43
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1
Fan		
Type x Quantity	—	Cross-flow×1
Air Flow Volume	CFM	294/341/500
Fan Motor Running Current	A	0.096
Fan Motor Power Output	W	20
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ12.7/Φ1/2
	Liquid(mm/inch)	Φ6.35/Φ1/4
Connection method	—	Flare Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	300×970×224/ (11-13/16×38-3/16×8-13/16)
Net Weight	kg/lbs	12.5/27.5
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND14G/B4B-T(U) .

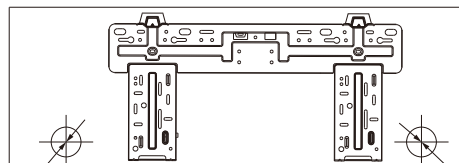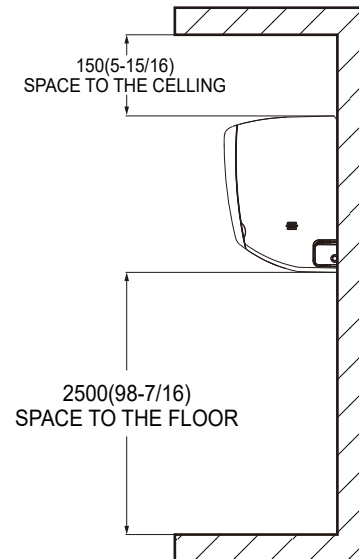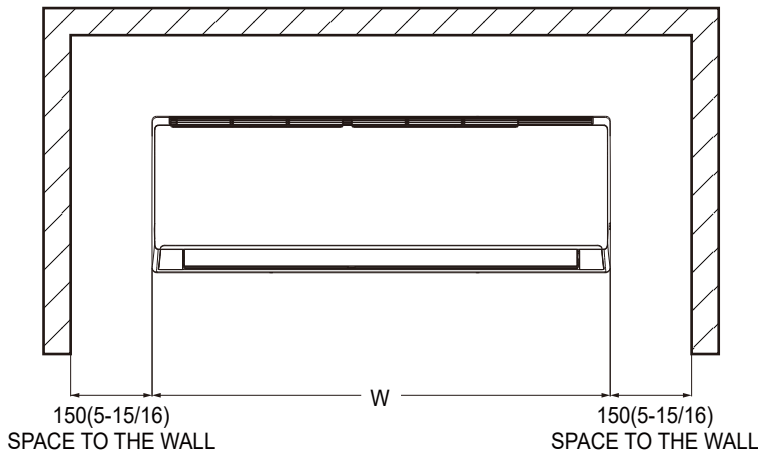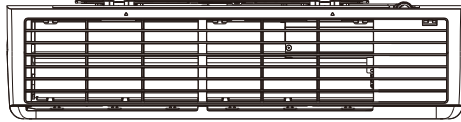

Left $\Phi 55(2-3/16)$ or $\Phi 70(2-3/4)$
(Rear piping hole)

Right $\Phi 55(2-3/16)$ or $\Phi 70(2-3/4)$
(Rear piping hole)

Model	Item	W	H	D
	GMV-ND14G/B4B-T(U)	970(38-3/16)	300(11-13/16)	224(8-13/16)

Unit:mm(in.)

