

208~230V Air Handler


Model:GMV-ND30A/A-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND30A/A-T(U)
Performance		
Rated Cooling Capacity	kBtu/h	30
Rated Heating Capacity	kBtu/h	34
Sound Pressure Level	dB(A)	42/44/46
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1.75
Fan		
Type × Quantity	—	Centrifugal ×1
Air Flow Volume	CFM	559/706/822
ESP	In.W.G	0.15/0~0.3
Fan Motor Running Current	A	1.4
Fan Motor Power Output	W	183.7
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ15.9/Φ5/8
	Liquid(mm/inch)	Φ9.52/Φ3/8
Connection method	—	Brazing Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	1105×460×540/ (43-1/2×18-1/8×21-1/4)
Net Weight	kg/lbs	56/124
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND30A/A-T(U).

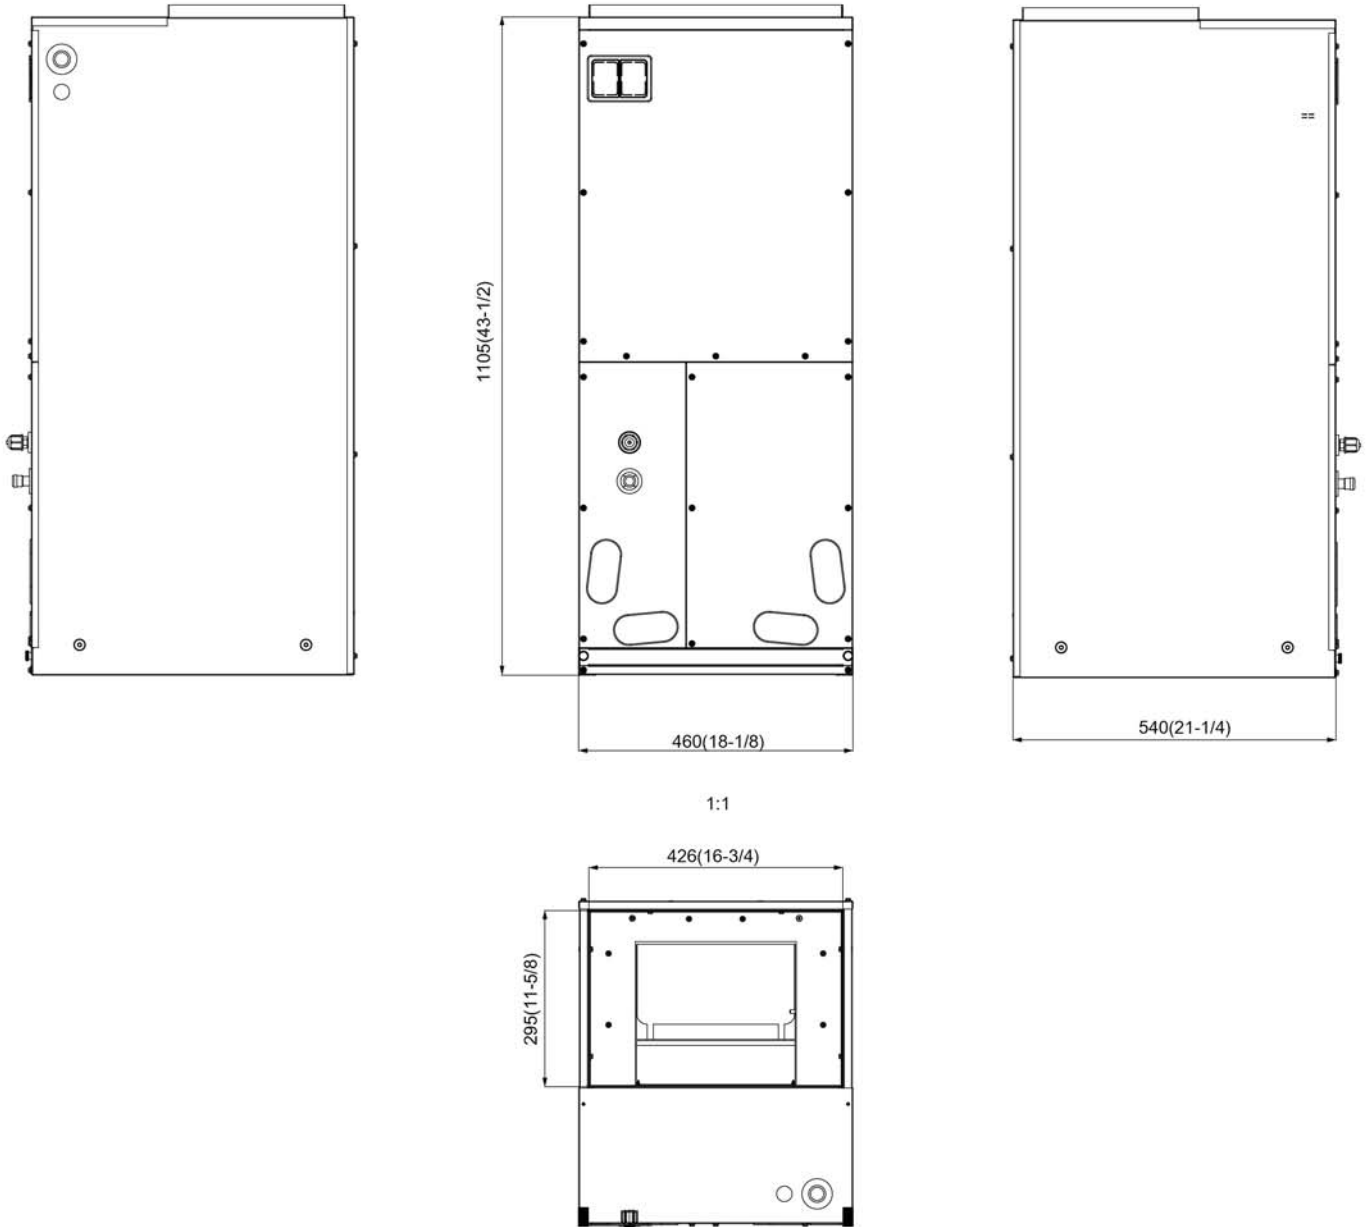

Unit:mm(in.)

