

208~230V Wall-Mounted Lomo






Model:GMV-ND30G/B4B-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND30G/B4B-T(U)
Performance		
Rated Cooling Capacity	kBtu/h	30
Rated Heating Capacity	kBtu/h	34
Sound Pressure Level	dB(A)	40/46/49
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1
Fan		
Type x Quantity	—	Cross-flow×1
Air Flow Volume	CFM	471/618/912
Fan Motor Running Current	A	0.32
Fan Motor Power Output	W	70
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ15.9/Φ5/8
	Liquid(mm/inch)	Φ9.52/Φ3/8
Connection method	—	Flare Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	326×1350×258/ (12-13/16×53-1/8×10-3/16)
Net Weight	kg/lbs	18.5/41
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of GMV-ND30G/B4B-T(U) .

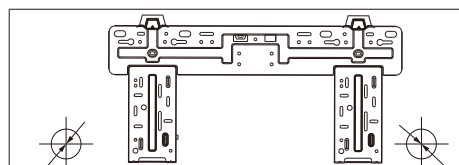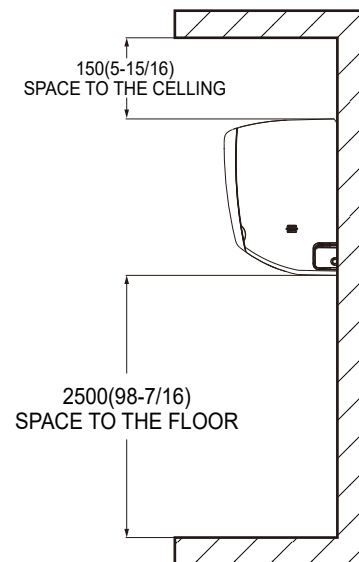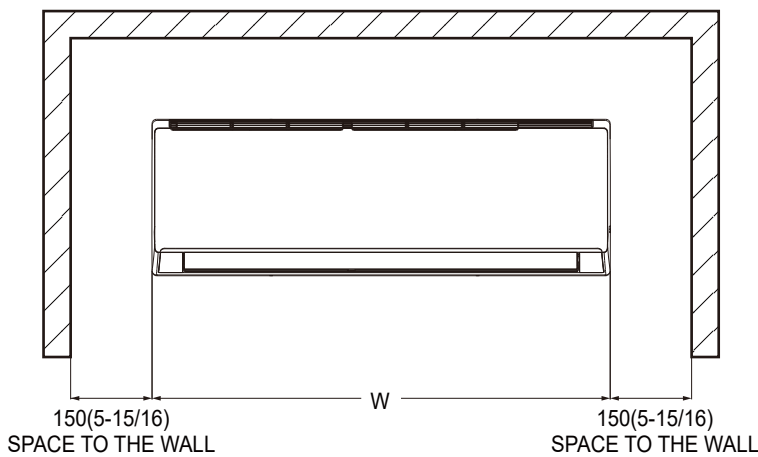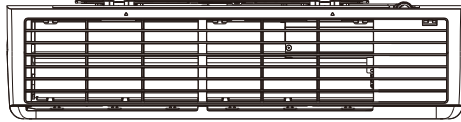

Left $\Phi 55(2-3/16)$ or $\Phi 70(2-3/4)$
(Rear piping hole)

Right $\Phi 55(2-3/16)$ or $\Phi 70(2-3/4)$
(Rear piping hole)

Model	Item	W	H	D
GMV-ND30G/B4B-T(U)		1350(53-1/8)	326(12-13/16)	258(10-3/16)

Unit:mm(in.)

