

## 208~230V Air Handler


### Model:GMV-ND48A/A-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND48A/A-T(U)
<b>Performance</b>		
Rated Cooling Capacity	kBtu/h	48
Rated Heating Capacity	kBtu/h	54
Sound Pressure Level	dB(A)	47/49/51
<b>Electrical Data</b>		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	4.25
<b>Fan</b>		
Type × Quantity	—	Centrifugal ×1
Air Flow Volume	CFM	1353/1500/1618
ESP	In.W.G	0.2/0~0.5
Fan Motor Running Current	A	3.4
Fan Motor Power Output	W	428.7
<b>Refrigerant Piping</b>		
Connection Pipe	Gas(mm/inch)	Φ15.9/Φ5/8
	Liquid(mm/inch)	Φ9.52/Φ3/8
Connection method	—	Brazing Connection
Refrigerant	—	R410A
<b>Dimension/Weight</b>		
Dimensions (H×W×D)	mm/inch	1224×630×540/ (48-1/4×24-7/8×21-1/4)
Net Weight	kg/lbs	81/179
<b>Other</b>		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

## Outline and Physical Dimensions of GMV-ND48A/A-T(U).

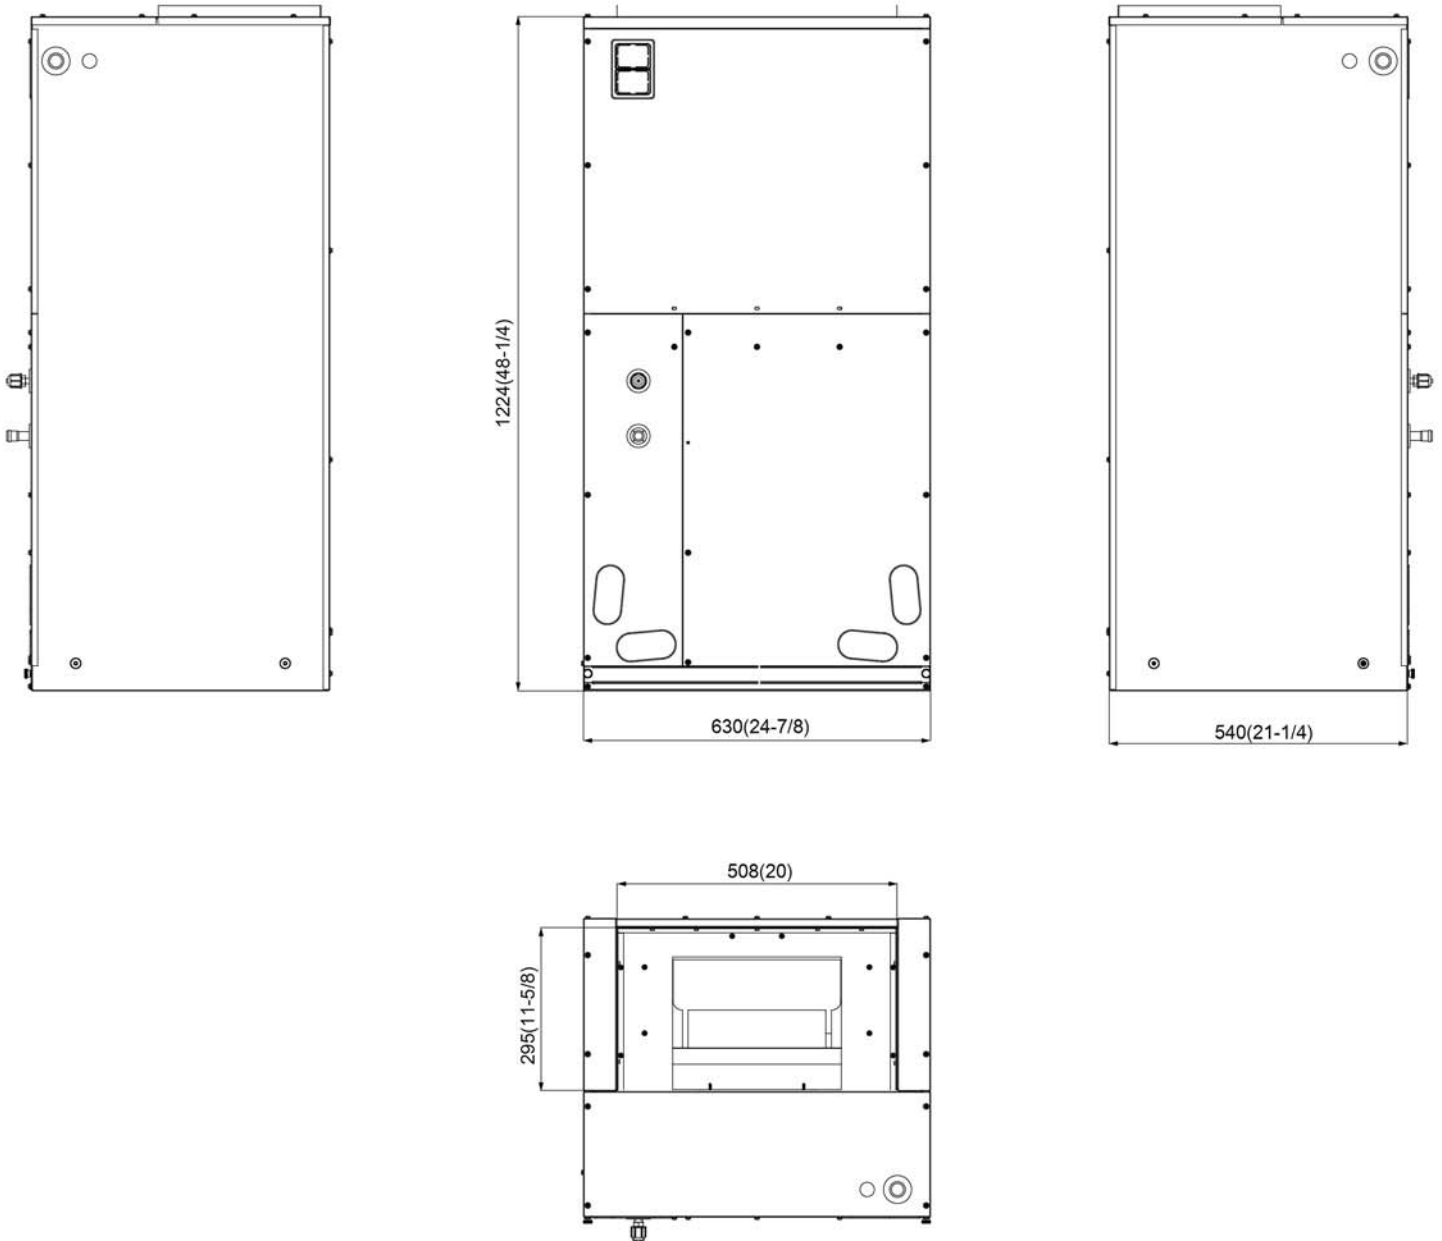

Unit:mm(in.)

