

## 208~230V Super High ESP Fan Coil


### Model:GMV-ND48PHS/B-T(U)



Specifications	Unit	Parameter
Model	—	GMV-ND48PHS/B-T(U)
Performance		
Rated Cooling Capacity	kBtu/h	48
Rated Heating Capacity	kBtu/h	54
Sound Pressure Level	dB(A)	41/43/46
Electrical Data		
Power Supply	Voltage,Phase, Hertz	208/230,1,60
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	1.7
Fan		
Type × Quantity	—	Centrifugal ×3
Air Flow Volume	CFM	971/1118/1383
ESP	Pa (In.W.G)	90/0~200 (0.36/0~0.8)
Fan Motor Running Current	A	1.3
Fan Motor Power Output	W	560
Refrigerant Piping		
Connection Pipe	Gas(mm/inch)	Φ15.9/Φ5/8
	Liquid(mm/inch)	Φ9.52/Φ3/8
Connection method	—	Brazing Connection
Refrigerant	—	R410A
Dimension/Weight		
Dimensions (H×W×D)	mm/inch	300×1400×700/ (11-13/16×55-1/8×27-9/16)
Net Weight	kg/lbs	58/128
Other		
Safety Certification	—	ETL

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

### Outline and Physical Dimensions of GMV-ND48PHS/B-T(U).

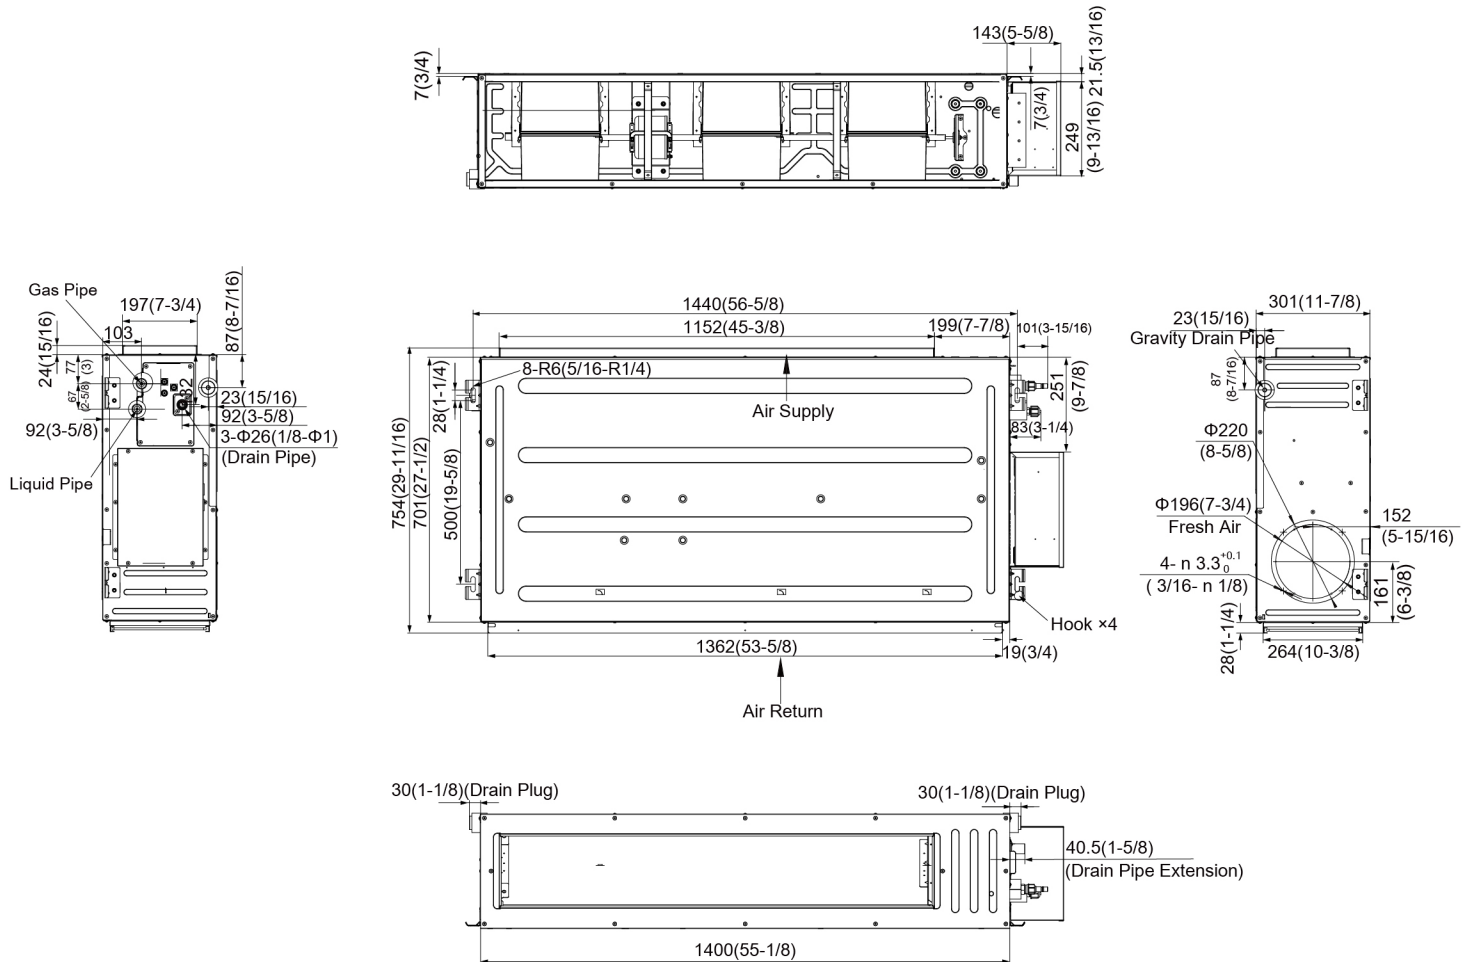

Model	Gas Pipe Diameter	Liquid Pipe Diameter
GMV-ND48PHS/B-T(U)	5/8"	3/8"

Unit:mm(in.)

