

208~230V Heat Recovery Mode Exchanger




Model:NCHS2B(U)



Specifications	Unit	Parameter
Model	—	NCHS2B(U)
Performance		
Rated Power Input	kW	0.02
Max.capacity of connecting indoor unit for Each Branch	kBtu	48.5
Total.capacity of connecting indoor unit for Mode Exchanger	kBtu	96
Connective Min.Capability	kBtu	7.5
Connective Max.Capability	kBtu	48.5
Electrical Data		
Power Supply(V,Ph,Hz)	—	208/230/1/60
Fuse Current	A	3.15
Circuit Breaker	A	15
Rated Current	A	0.09
Maximum Overcurrent Protection (MOP)	A	15
Minimum Circuit Amps (MCA)	A	10
Refrigerant Piping		
High Pressure Gas Pipe (Outdoor Unit)	inch/mm	Φ3/4/Φ19.05
Low Pressure Gas Pipe (Outdoor Unit)	inch/mm	Φ7/8/Φ22.2
Liquid Pipe (Outdoor Unit)	inch/mm	Φ3/8/Φ9.52
Gas Pipe (Indoor Unit)	inch/mm	Φ5/8/Φ15.9
Liquid Pipe (Indoor Unit)	inch/mm	Φ3/8/Φ9.52
Dimensions/Weight		
Dimension of Outline (W)	inch/mm	18-3/8/468
Dimension of Outline (D)	inch/mm	14-7/8/377
Dimension of Outline (H)	inch/mm	8-7/8/225
Net Weight	lbs/kg	34/15.6
Other		
Max.quantity of connecting indoor unit for Mode Exchanger	N	16
Max.branch quantity of connecting indoor unit	N	2
Max.quantity of connecting indoor unit for Each Branch	N	8
Connection Method	—	Brazing Connection

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline and Physical Dimensions of NCHS2B(U).

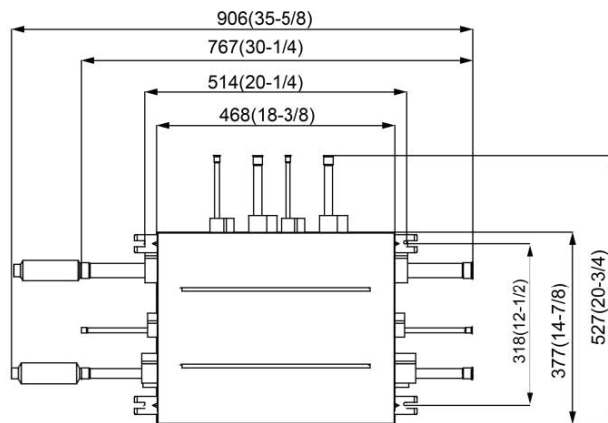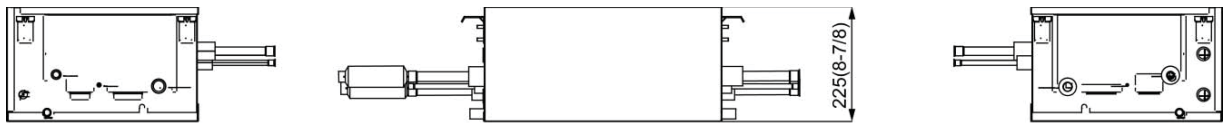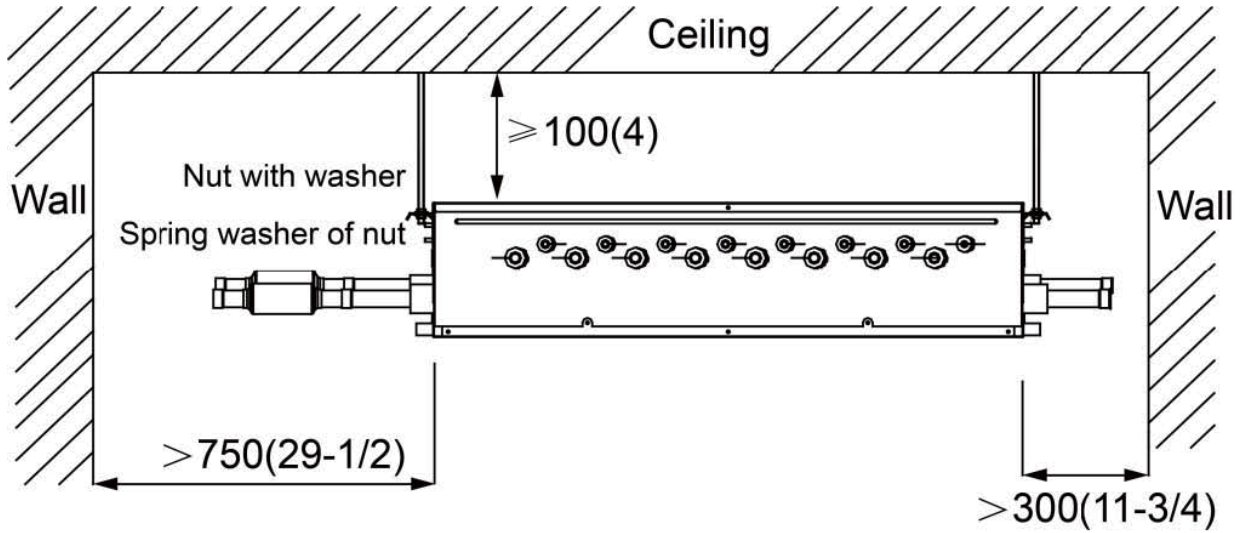

Unit:mm(in.)

